

SK75MLI07S5TD1E1



SEMITOP®E1

3-Level NPC

SK75MLI07S5TD1E1

Features*

- Optimized design for superior thermal performance
- Low inductive design
- Press-Fit contact technology
- 650V Trench5 IGBT (S5/L5)
- Rapid switching diode technology
- Integrated NTC temperature sensor
- UL recognized file no. E 63 532

Typical Applications

- UPS
- Solar


Remarks*

- Recommended $T_{j,op} = -40 \dots +150 \text{ °C}$
- IGBT1: outer IGBTs T1 & T4
- IGBT2: inner IGBTs T2 & T3
- Diode1: outer Diodes D1 & D4
- Diode2: inner Diodes D2 & D3
- Diode5: clamping Diodes D5 & D6

Footnotes

¹⁾ Please find further technical information on the SEMIKRON website.

Absolute Maximum Ratings			
Symbol	Conditions	Values	Unit
IGBT1			
V_{CES}	$T_j = 25 \text{ °C}$	650	V
I_C	$\lambda_{paste}=0.8 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	70
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	55
I_C	$\lambda_{paste}=2.5 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	85
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	67
I_{Cnom}		75	A
I_{CRM}		150	A
V_{GES}		-20 ... 20	V
t_{psc}	$V_{CC} = 360 \text{ V}, V_{GE} \leq 15 \text{ V}, T_j = 150 \text{ °C}, V_{CES} \leq 650 \text{ V}$	not capable	μs
T_j		-40 ... 175	$^{\circ}\text{C}$
IGBT2			
V_{CES}	$T_j = 25 \text{ °C}$	650	V
I_C	$\lambda_{paste}=0.8 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	102
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	80
I_C	$\lambda_{paste}=2.5 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	128
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	101
I_{Cnom}		75	A
I_{CRM}		150	A
V_{GES}		-20 ... 20	V
t_{psc}	$V_{CC} = 360 \text{ V}, V_{GE} \leq 15 \text{ V}, T_j = 150 \text{ °C}, V_{CES} \leq 650 \text{ V}$	not capable	μs
T_j		-40 ... 175	$^{\circ}\text{C}$
Diode1			
V_{RRM}	$T_j = 25 \text{ °C}$	650	V
I_F	$\lambda_{paste}=0.8 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	53
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	42
I_F	$\lambda_{paste}=2.5 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	60
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	48
I_{FRM}		100	A
I_{FSM}	10 ms, sin 180°, $T_j = 25 \text{ °C}$	300	A
T_j		-40 ... 175	$^{\circ}\text{C}$
Diode2			
V_{RRM}	$T_j = 25 \text{ °C}$	650	V
I_F	$\lambda_{paste}=0.8 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	59
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	46
I_F	$\lambda_{paste}=2.5 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	68
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	53
I_{FRM}		100	A
I_{FSM}	10 ms, sin 180°, $T_j = 25 \text{ °C}$	350	A
T_j		-40 ... 175	$^{\circ}\text{C}$

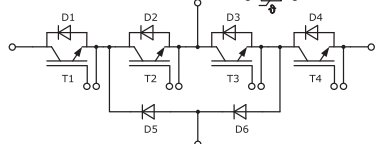

MLI-T

SK75MLI07S5TD1E1



3-Level NPC

SK75MLI07S5TD1E1

Features*

- Optimized design for superior thermal performance
- Low inductive design
- Press-Fit contact technology
- 650V Trench5 IGBT (S5/L5)
- Rapid switching diode technology
- Integrated NTC temperature sensor
- UL recognized file no. E 63 532

Typical Applications


- UPS
- Solar

Remarks*

- Recommended $T_{j,op} = -40 \dots +150 \text{ °C}$
- IGBT1: outer IGBTs T1 & T4
- IGBT2: inner IGBTs T2 & T3
- Diode1: outer Diodes D1 & D4
- Diode2: inner Diodes D2 & D3
- Diode5: clamping Diodes D5 & D6

Footnotes

¹⁾ Please find further technical information on the SEMIKRON website.

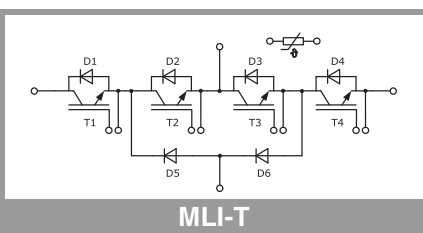

Absolute Maximum Ratings				
Symbol	Conditions	Values	Unit	
Diode5				
V_{RRM}	$T_j = 25 \text{ °C}$	650	V	
I_F	$\lambda_{paste}=0.8 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	67	A
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	53	A
I_F	$\lambda_{paste}=2.5 \text{ W/(mK)}$	$T_s = 25 \text{ °C}$	81	A
	$T_j = 175 \text{ °C}$	$T_s = 70 \text{ °C}$	64	A
I_{FRM}		150	A	
I_{FSM}	10 ms, sin 180°, $T_j = 25 \text{ °C}$	450	A	
T_j		-40 ... 175	°C	
Module				
$I_{t(RMS)}$	$\Delta T_{terminal}$ at PCB joint = 30 K, per pin	30	A	
T_{stg}	module without TIM	-40 ... 125	°C	
V_{isol}	AC, sinusoidal, t = 1 min	2500	V	

Characteristics					
Symbol	Conditions	min.	typ.	max.	Unit
IGBT1					
$V_{CE(sat)}$	$I_C = 75 \text{ A}$ $V_{GE} = 15 \text{ V}$ chiplevel	$T_j = 25 \text{ °C}$	1.42	1.75	V
		$T_j = 150 \text{ °C}$	1.61	2.06	V
V_{CE0}	chiplevel	$T_j = 25 \text{ °C}$	0.95	1.05	V
		$T_j = 150 \text{ °C}$	0.85	1.00	V
r_{CE}	$V_{GE} = 15 \text{ V}$ chiplevel	$T_j = 25 \text{ °C}$	6.3	9.3	mΩ
		$T_j = 150 \text{ °C}$	10	14	mΩ
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 0.75 \text{ mA}$	3.2	4	4.8	V
I_{CES}	$V_{GE} = 0 \text{ V}, V_{CE} = 650 \text{ V}, T_j = 25 \text{ °C}$			0.3	mA
C_{ies}	$V_{CE} = 25 \text{ V}$ $V_{GE} = 0 \text{ V}$	$f = 1 \text{ MHz}$	4.5		nF
C_{oes}		$f = 1 \text{ MHz}$	0.13		nF
C_{res}		$f = 1 \text{ MHz}$	0.017		nF
Q_G	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$		360		nC
R_{Gint}	$T_j = 25 \text{ °C}$		0		Ω
$t_{d(on)}$	$V_{CE} = 300 \text{ V}$ $I_C = 75 \text{ A}$	$T_j = 150 \text{ °C}$	43		ns
t_r		$T_j = 150 \text{ °C}$	34		ns
E_{on}	$V_{GE} = +15/-15 \text{ V}$ $R_{G on} = 15 \text{ Ω}$	$T_j = 150 \text{ °C}$	1.15		mJ
$t_{d(off)}$		$T_j = 150 \text{ °C}$	163		ns
t_f	$R_{G off} = 15 \text{ Ω}$ $di/dt_{on} = 1950 \text{ A/μs}$ $di/dt_{off} = 1440 \text{ A/μs}$	$T_j = 150 \text{ °C}$	33		ns
		$T_j = 150 \text{ °C}$	1.46		mJ
E_{off}	$dv/dt = 7220 \text{ V/μs}$				
$R_{th(j-s)}$	per IGBT, $\lambda_{paste}=0.8 \text{ W/(mK)}$		1.06		K/W
$R_{th(j-s)}$	per IGBT, $\lambda_{paste}=2.5 \text{ W/(mK)}$		0.78		K/W

SK75MLI07S5TD1E1



SEMITOP®E1

3-Level NPC

SK75MLI07S5TD1E1

Features*

- Optimized design for superior thermal performance
- Low inductive design
- Press-Fit contact technology
- 650V Trench5 IGBT (S5/L5)
- Rapid switching diode technology
- Integrated NTC temperature sensor
- UL recognized file no. E 63 532

Typical Applications


- UPS
- Solar

Remarks*

- Recommended $T_{j,op} = -40 \dots +150 \text{ °C}$
- IGBT1: outer IGBTs T1 & T4
- IGBT2: inner IGBTs T2 & T3
- Diode1: outer Diodes D1 & D4
- Diode2: inner Diodes D2 & D3
- Diode5: clamping Diodes D5 & D6

Footnotes

¹⁾ Please find further technical information on the SEMIKRON website.

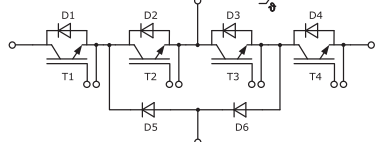

MLI-T

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
IGBT2						
$V_{CE(sat)}$	$I_C = 75 \text{ A}$ $V_{GE} = 15 \text{ V}$ chipllevel	$T_j = 25 \text{ °C}$	1.10	1.45		V
		$T_j = 150 \text{ °C}$	1.12	1.38		V
V_{CE0}	chipllevel	$T_j = 25 \text{ °C}$	0.78	0.98		V
		$T_j = 150 \text{ °C}$	0.65	0.85		V
r_{CE}	$V_{GE} = 15 \text{ V}$ chipllevel	$T_j = 25 \text{ °C}$	4.3	6.3		mΩ
		$T_j = 150 \text{ °C}$	6.3	7.1		mΩ
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 1 \text{ mA}$		4.2	5	5.8	V
I_{CES}	$V_{GE} = 0 \text{ V}, V_{CE} = 650 \text{ V}, T_j = 25 \text{ °C}$				0.45	mA
C_{ies}	$V_{CE} = 25 \text{ V}$ $V_{GE} = 0 \text{ V}$	$f = 1 \text{ MHz}$		12.1		nF
C_{oes}		$f = 1 \text{ MHz}$		0.15		nF
C_{res}		$f = 1 \text{ MHz}$		0.042		nF
Q_G	$V_{GE} = -15 \text{ V} \dots +15 \text{ V}$			1000		nC
R_{Gint}	$T_j = 25 \text{ °C}$			0		Ω
$t_{d(on)}$	$V_{CC} = 300 \text{ V}$	$T_j = 150 \text{ °C}$		21		ns
t_r	$I_C = 75 \text{ A}$	$T_j = 150 \text{ °C}$		16		ns
E_{on}	$V_{GE} = +15/-15 \text{ V}$	$T_j = 150 \text{ °C}$		0.08		mJ
$t_{d(off)}$	$R_{G on} = 1 \text{ Ω}$	$T_j = 150 \text{ °C}$		223		ns
t_f	$R_{G off} = 1 \text{ Ω}$	$T_j = 150 \text{ °C}$		118		ns
E_{off}	$di/dt_{on} = 4400 \text{ A/μs}$ $di/dt_{off} = 470 \text{ A/μs}$ $dv/dt = 2630 \text{ V/μs}$	$T_j = 150 \text{ °C}$		4.43		mJ
		$T_j = 150 \text{ °C}$		4.43		mJ
$R_{th(j-s)}$	per IGBT, $\lambda_{paste} = 0.8 \text{ W/(mK)}$			0.94		K/W
$R_{th(j-s)}$	per IGBT, $\lambda_{paste} = 2.5 \text{ W/(mK)}$			0.67		K/W
Diode1						
$V_F = V_{EC}$	$I_F = 50 \text{ A}$ chipllevel	$T_j = 25 \text{ °C}$	1.35	1.92		V
		$T_j = 150 \text{ °C}$	1.29	1.89		V
V_{F0}	chipllevel	$T_j = 25 \text{ °C}$	0.90	1.10		V
		$T_j = 150 \text{ °C}$	0.71	0.94		V
r_F	chipllevel	$T_j = 25 \text{ °C}$	9.0	16		mΩ
		$T_j = 150 \text{ °C}$	12	19		mΩ
I_{RRM}	$I_F = 75 \text{ A}$			73		A
Q_{rr}	$di/dt_{off} = 5100 \text{ A/μs}$ $V_R = 300 \text{ V}$			4.3		μC
E_{rr}	$V_{GE} = +15/-15 \text{ V}$			1.25		mJ
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 0.8 \text{ W/(mK)}$			1.43		K/W
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 2.5 \text{ W/(mK)}$			1.19		K/W
Diode2						
$V_F = V_{EC}$	$I_F = 50 \text{ A}$ chipllevel	$T_j = 25 \text{ °C}$	1.55	1.82		V
		$T_j = 150 \text{ °C}$	1.45	1.75		V
V_{F0}	chipllevel	$T_j = 25 \text{ °C}$	1.10	1.32		V
		$T_j = 150 \text{ °C}$	0.95	1.14		V
r_F	chipllevel	$T_j = 25 \text{ °C}$	9.0	10		mΩ
		$T_j = 150 \text{ °C}$	10	12		mΩ
I_{RRM}	$I_F = 50 \text{ A}$			-		A
Q_{rr}				-		μC
E_{rr} ¹⁾	$V_{GE} = +15/-15 \text{ V}$			-		mJ
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 0.8 \text{ W/(mK)}$			1.36		K/W
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 2.5 \text{ W/(mK)}$			1.11		K/W

SK75MLI07S5TD1E1



SEMITOP®E1

3-Level NPC

SK75MLI07S5TD1E1

Features*

- Optimized design for superior thermal performance
- Low inductive design
- Press-Fit contact technology
- 650V Trench5 IGBT (S5/L5)
- Rapid switching diode technology
- Integrated NTC temperature sensor
- UL recognized file no. E 63 532

Typical Applications

- UPS
- Solar


Remarks*

- Recommended $T_{j,op} = -40 \dots +150 \text{ °C}$
- IGBT1: outer IGBTs T1 & T4
- IGBT2: inner IGBTs T2 & T3
- Diode1: outer Diodes D1 & D4
- Diode2: inner Diodes D2 & D3
- Diode5: clamping Diodes D5 & D6

Footnotes

¹⁾Please find further technical information on the SEMIKRON website.

Characteristics						
Symbol	Conditions		min.	typ.	max.	Unit
Diode5						
$V_F = V_{EC}$	$I_F = 75 \text{ A}$	$T_j = 25 \text{ °C}$		1.35	1.92	V
		chipelevel	$T_j = 150 \text{ °C}$		1.30	1.89
V_{F0}	chipelevel	$T_j = 25 \text{ °C}$		0.90	1.10	V
			$T_j = 150 \text{ °C}$		0.71	0.94
r_F	chipelevel	$T_j = 25 \text{ °C}$		6.0	11	mΩ
		$T_j = 150 \text{ °C}$		7.9	13	mΩ
I_{RRM}	$I_F = 75 \text{ A}$	$T_j = 150 \text{ °C}$		67		A
Q_{rr}	$di/dt_{off} = 2150 \text{ A}/\mu\text{s}$ $V_R = 300 \text{ V}$	$T_j = 150 \text{ °C}$		4.36		μC
E_{rr}	$V_{GE} = +15/-15 \text{ V}$	$T_j = 150 \text{ °C}$		0.98		mJ
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 0.8 \text{ W}/(\text{mK})$			1.25		K/W
$R_{th(j-s)}$	per Diode, $\lambda_{paste} = 2.5 \text{ W}/(\text{mK})$			0.95		K/W
Module						
L_{sCE1}				14		nH
L_{sCE2}				18		nH
R_{CC+EE}			$T_s = 25 \text{ °C}$	-		mΩ
			$T_s = 150 \text{ °C}$	-		mΩ
M_s	to heatsink			1.6	2.3	Nm
M_t				-		Nm
				-		Nm
w				25		g
Temperature Sensor						
R_{25}	$T_r = 25 \text{ °C}$			22 ±5%		kΩ
$B_{25/50}$	$R(T) = R_{25} \exp[B_{25/50}(1/T - 1/T_{25})]$; $T[\text{K}]$			3950 ±3%		K

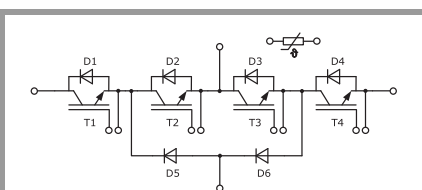

MLI-T

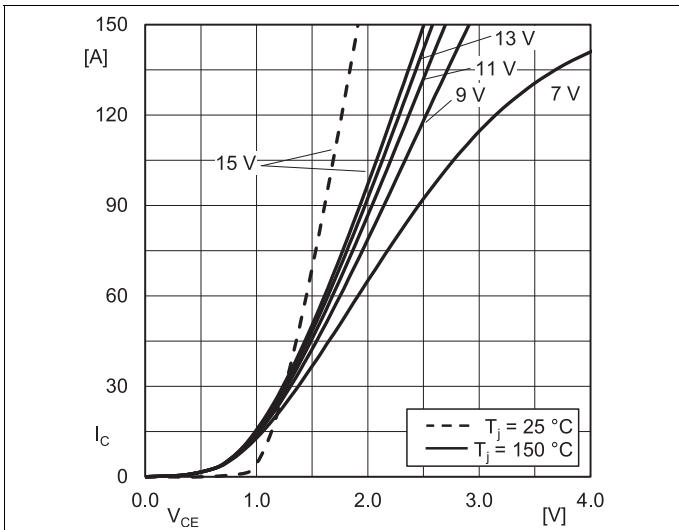


Fig. 1: Typ. IGBT1 output characteristic, incl. $R_{CC'+EE'}$

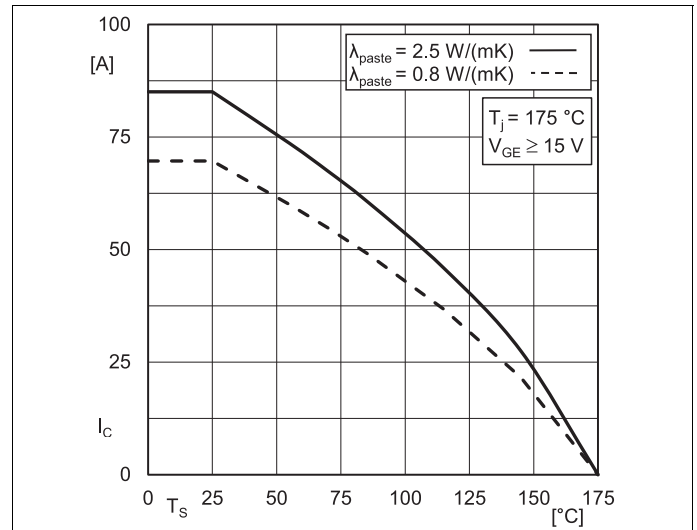


Fig. 2: IGBT1 rated current vs. Temperature $I_c=f(T_s)$

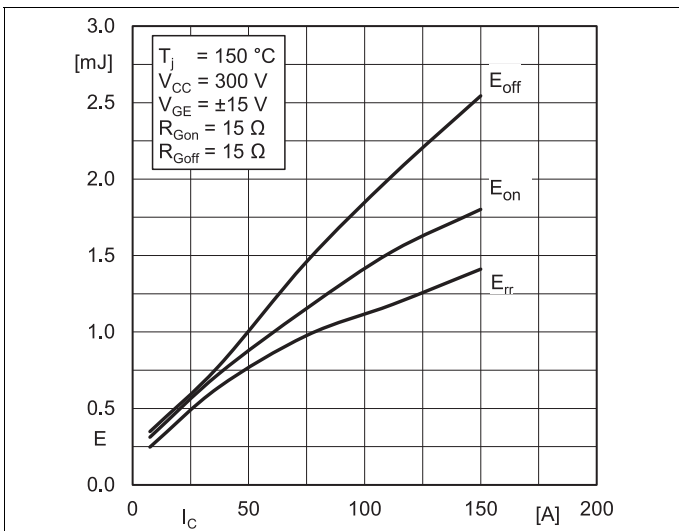


Fig. 3: Typ. IGBT1 & Diode5 turn-on /-off energy = $f(I_c)$

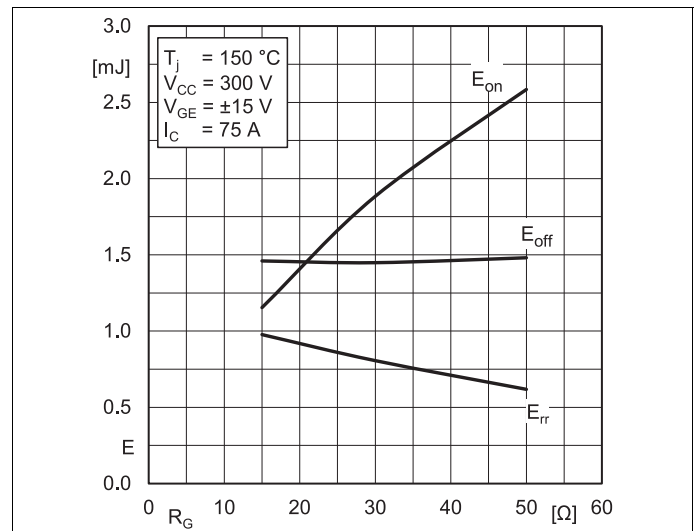


Fig. 4: Typ. IGBT1 & Diode5 turn-on /-off energy = $f(R_G)$

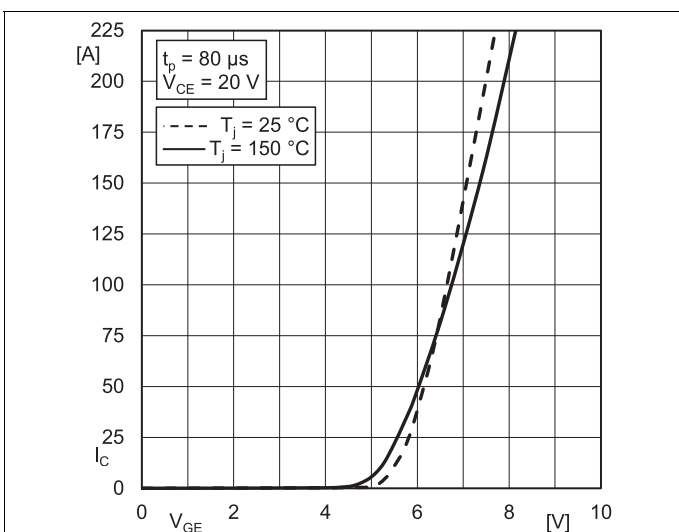


Fig. 5: Typ. IGBT1 transfer characteristic

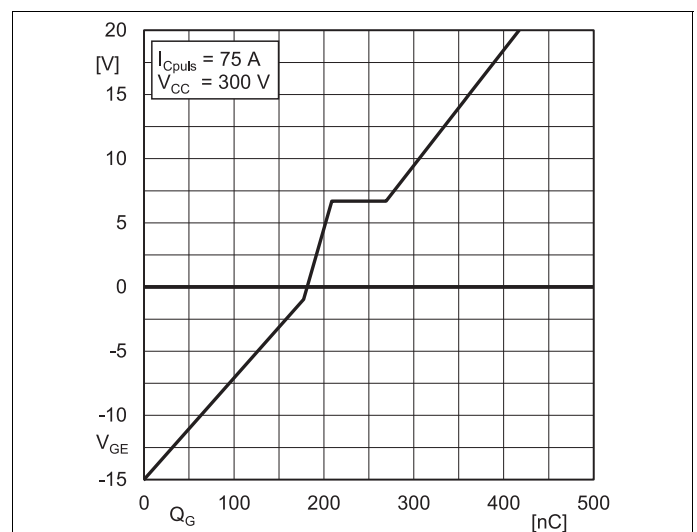
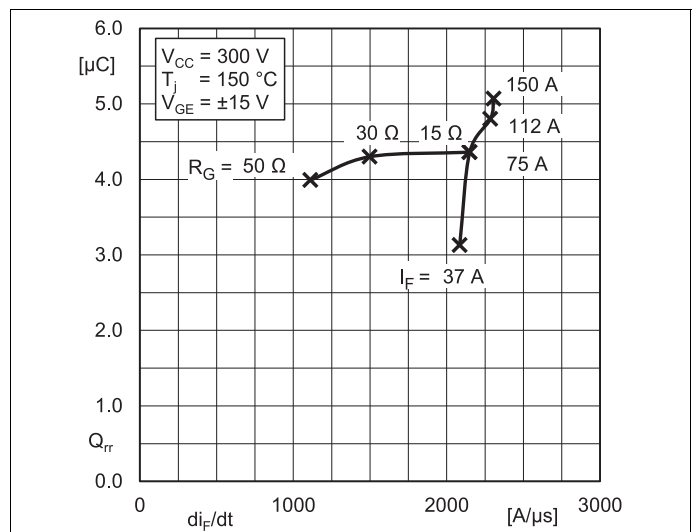
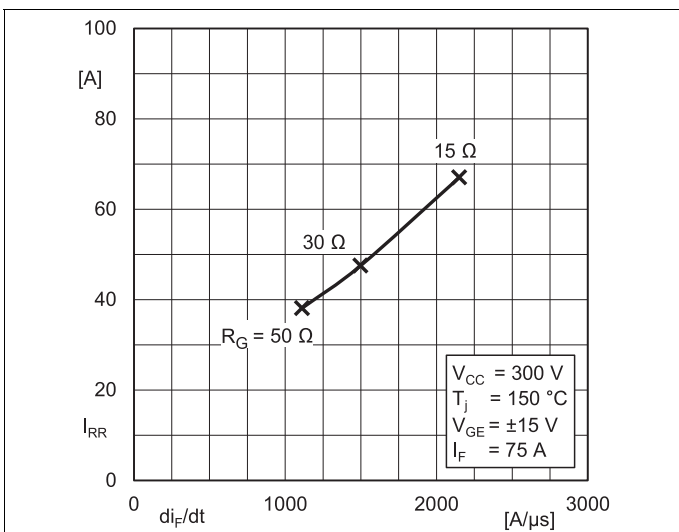
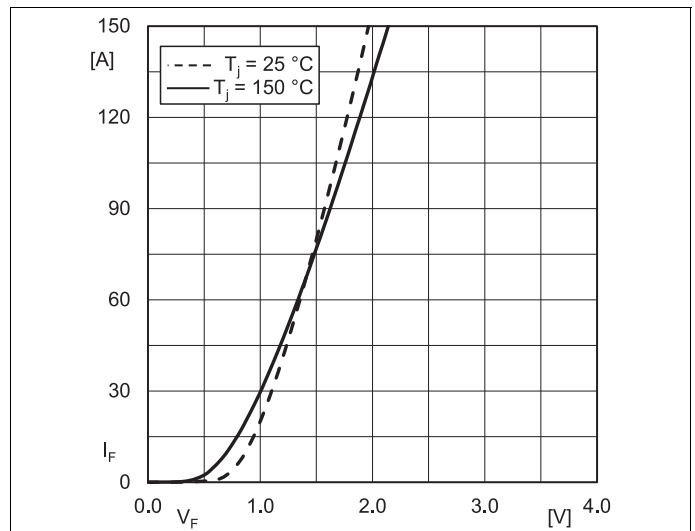
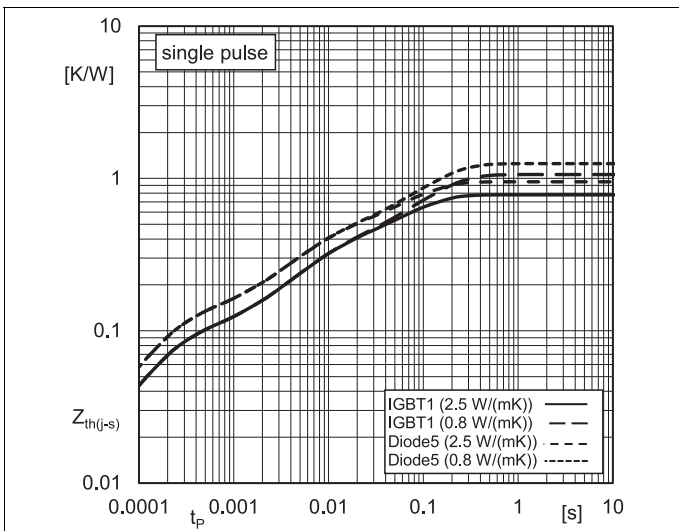
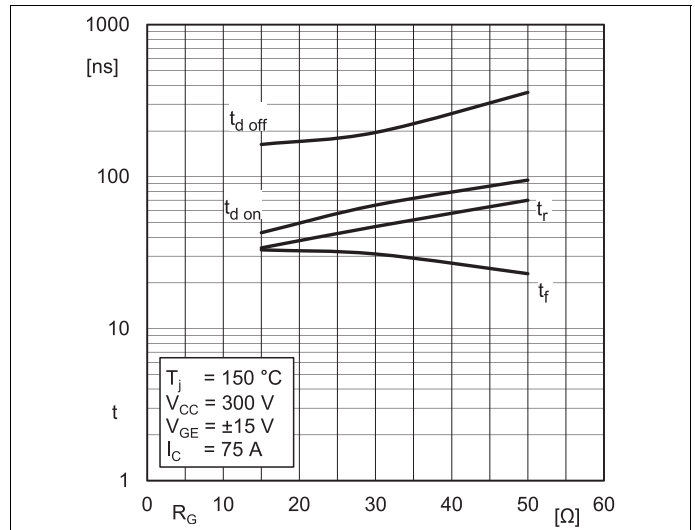
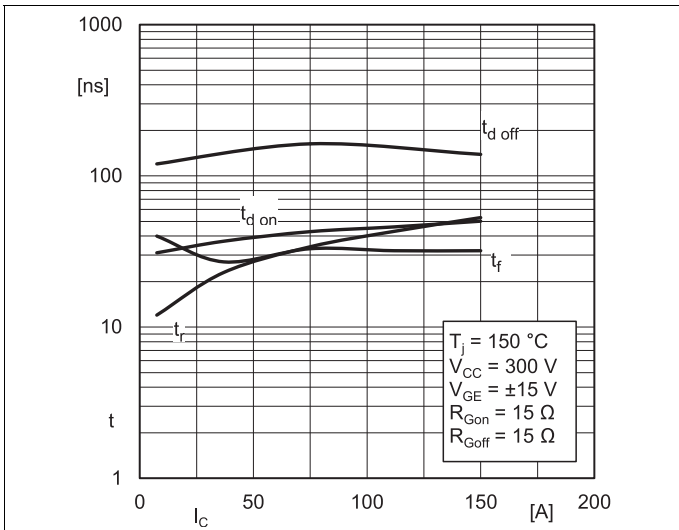


Fig. 6: Typ. IGBT1 gate charge characteristic



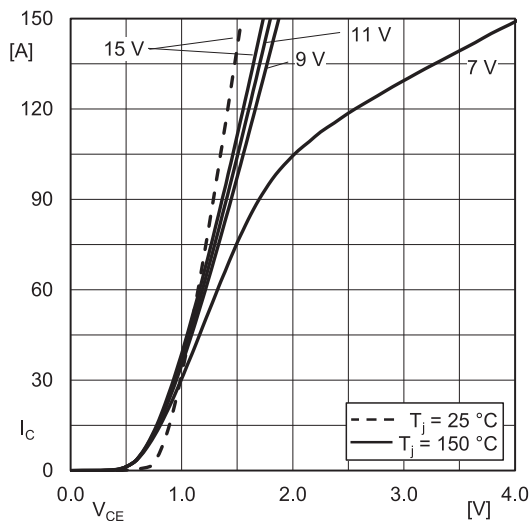


Fig. 13: Typ. IGBT2 output characteristic, incl. R_{CC+EE}

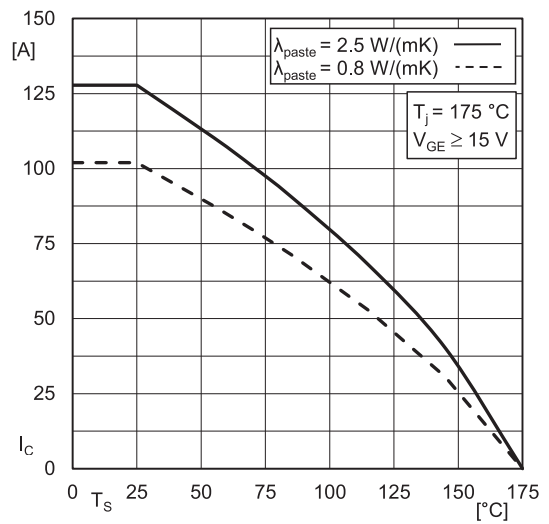


Fig. 14: IGBT2 Rated current vs. Temperature $I_C = f(T_s)$

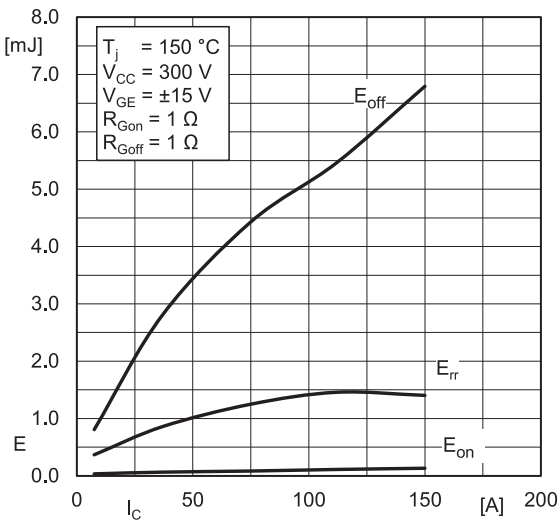


Fig. 15: Typ. IGBT2 & Diode1 turn-on /-off energy = $f(I_C)$

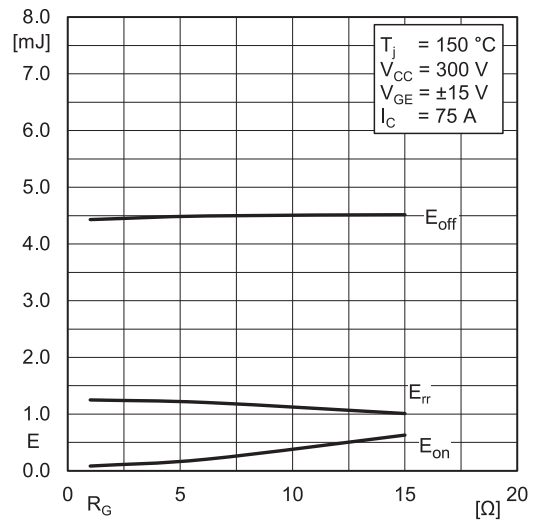


Fig. 16: Typ. IGBT2 & Diode1 turn-on /-off energy = $f(R_G)$

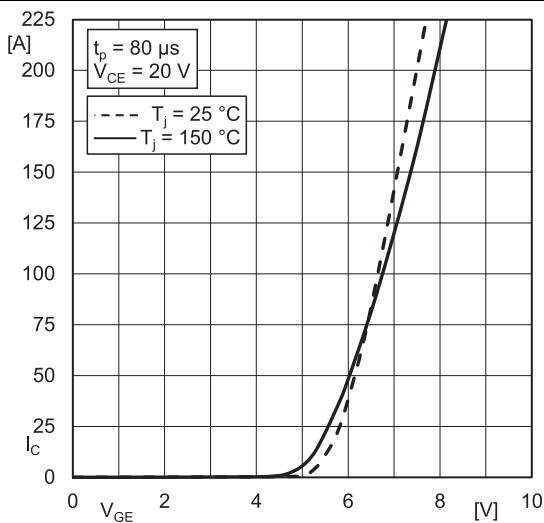


Fig. 17: Typ. IGBT2 transfer characteristic

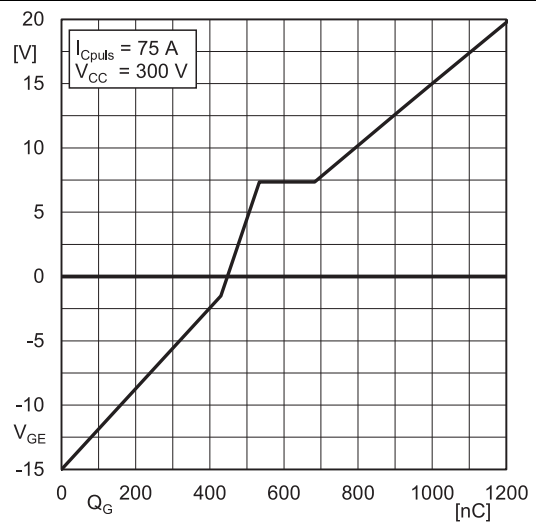


Fig. 18: Typ. IGBT2 gate charge characteristic

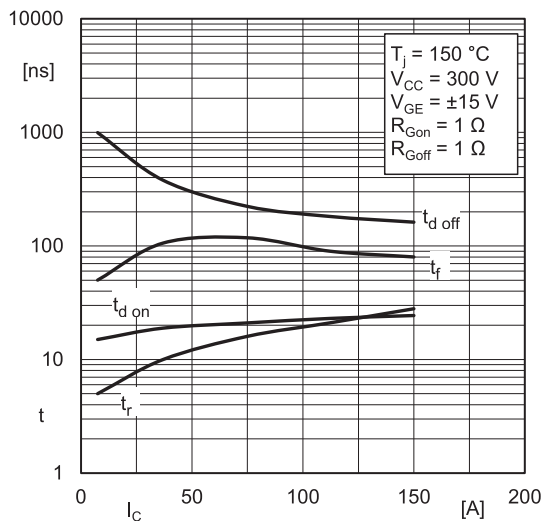


Fig. 19: Typ. IGBT2 switching times vs. I_C

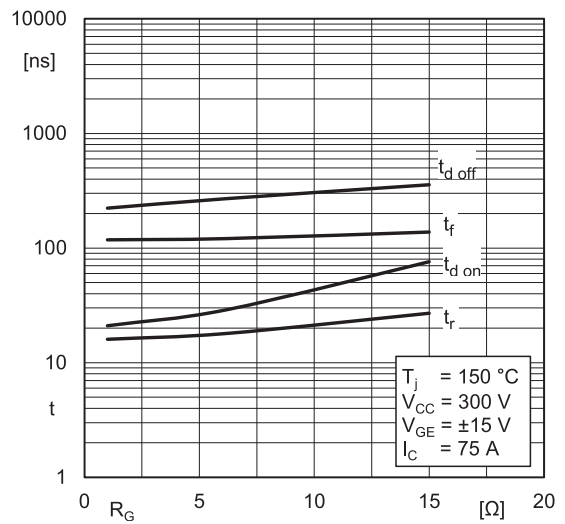


Fig. 20: Typ. IGBT2 switching times vs. gate resistor R_G

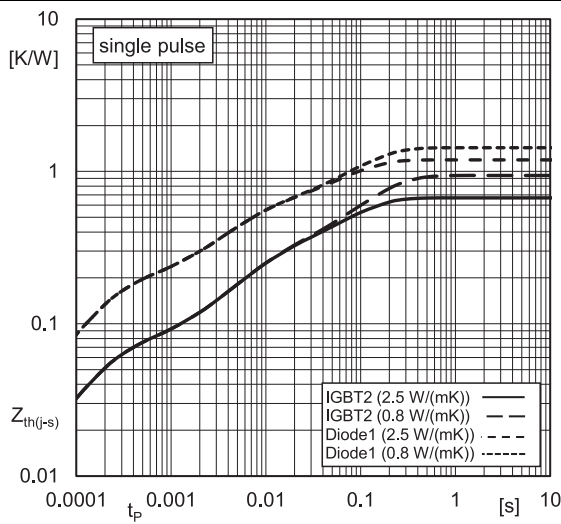


Fig. 21: Typ. transient thermal impedance

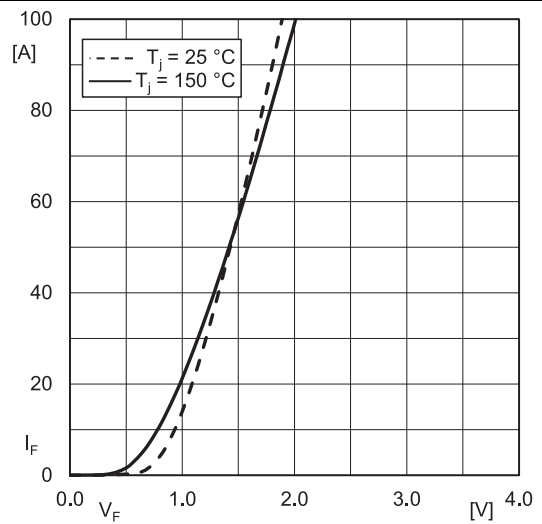


Fig. 22: Typ. Diode1 forward characteristic, incl. $R_{CC+EE'}$

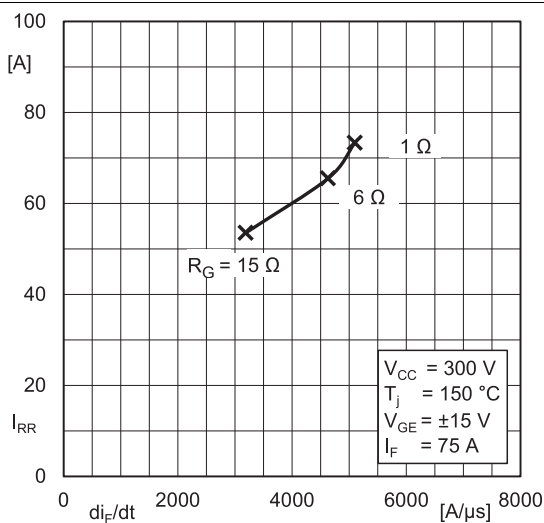


Fig. 23: Typ. Diode1 peak reverse recovery current





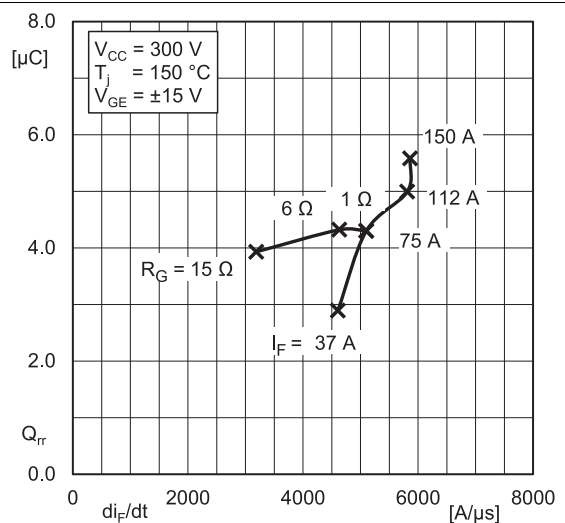



Fig. 24: Typ. Diode1 recovery charge

SK75MLI07S5TD1E1

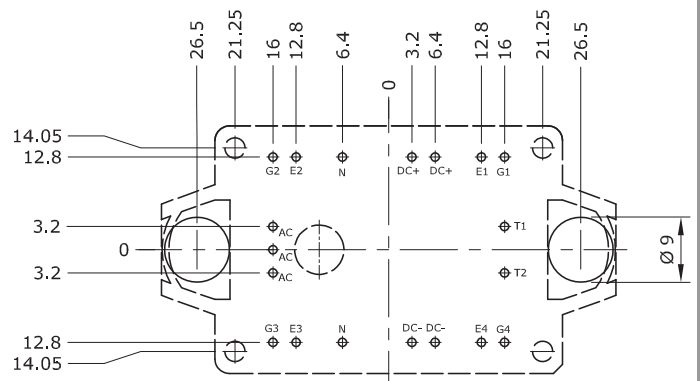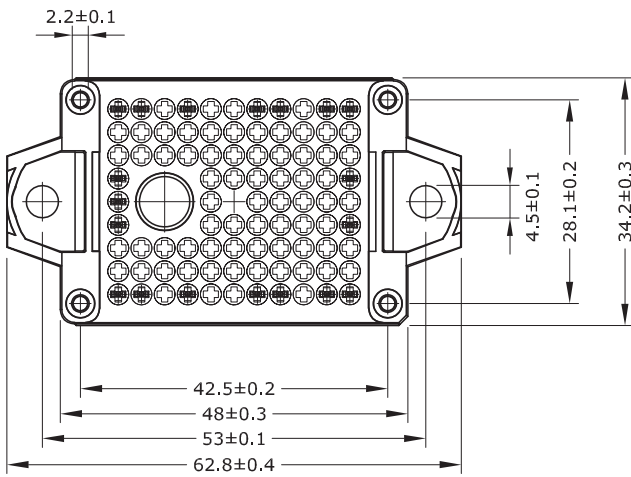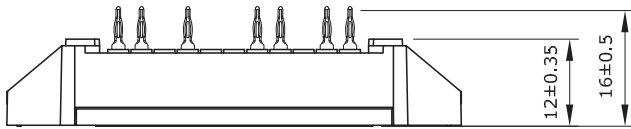

- Pin-Grid 3.2 mm
- Tolerance of PCB hole pattern $\boxed{\oplus \text{Ø}0.1}$
- Diameters of drill $\text{Ø} 1.15\text{mm}$
- Copper thickness in hole 25 - 50 μm
- Hole specification for contacts:
refer to SEMITOP E1/E2 Mounting Instruction

SEMITOP®E1

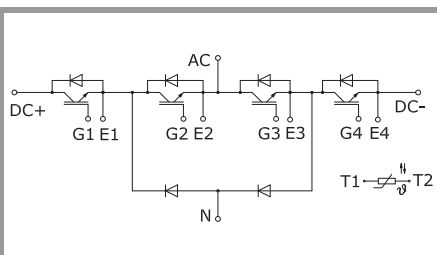

MLI-T

This is an electrostatic discharge sensitive device (ESDS) due to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.