

SEMITOP[®] 3

3-phase bridge rectifier + brake chopper

SK 55 DGL 126

Preliminary Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded alumium oxide ceramic (DCB)
- echnology

Typical Applications*


Absolute Maximum Ratings		T _s = 25°C	T_s = 25°C, unless otherwise specified			
Symbol	Conditions		Values			
IGBT - C	hopper					
V _{CES}			1200		V	
I _C	T _s = 25 (80) °C		40 (32)		А	
I _{CRM}	I_{CRM} = 2 x I_{Cnom} , t_p = 1 ms		70		А	
V _{GES}			±20		V	
Т _ј			-40 +150		°C	
Diode - C	hopper	·			•	
I _F	T _s = 25 (80) °C		45 (35)			
I _{FRM}	$I_{FRM} = 2xI_{Fnom}, t_p = 1 \text{ ms}$		100			
T _j			-40 +150		°C	
Rectifier		•				
V _{RRM}			1600		V	
I _D	T _s = 80 °C		55		А	
I_{FSM} / I_{TSM}	t _p = 10 ms , sin 180 ° ,T _j = 25 °C		370			
l ² t	t _p = 10 ms , sin 180 ° ,T _j = 25 °C		685 A ²			
Т _ј			-40 +150		°C	
T _{sol}	Terminals, 10s		260			
T _{stg}			-40 +125			
V _{isol}	AC, 1 min. / 1s		2500 / 3000 V			
Characte	Characteristics		T_s = 25°C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units	
IGBT - C	hopper					
	I _C = 35 A, T _i = () °C		1,7 (2)	2,1	V	
V _{GE(th)}	$V_{GE} = V_{CE}, I_{C} = 1,5 \text{ mA}$	5	5,8	6,5	V	
V Č	$T = 25 \circ C (125) \circ C$	1	1 (0 0)	1 0	1/	


•	Trench IGBT technology
	CAL Technology FWD


Rectifier


	Diode
	V _F
	V _(TO)
	r _T
	R _{th(j-s)}
* * * *	Tempe
	R _{ts}
	Mecha
ϫϫϫ ⊶ <u></u> ℩ ∣	w
	M_{s}
DGL	


$\begin{array}{c c c c c c c c c c c c c c c c c c c $	V V V mΩ nF					
$ \begin{array}{c c} V_{GE(th)} & V_{GE} = V_{CE}, \ i_C = 1,5 \ \text{mA} & 5 & 5,8 & 6,5 \\ V_{CE(TO)} & T_j = 25 \ ^\circ \text{C} \ (125) \ ^\circ \text{C} & 1 \ (0,9) & 1,2 \\ r_T & T_j = 25 \ ^\circ \text{C} \ (125) \ ^\circ \text{C} & 20 \ (31) & 26 \\ C_{ies} & V_{CE} = 25 \ V_{GE} = 0 \ \text{V}, \ \text{f} = 1 \ \text{MHz} & 2,4 \\ C_{oes} & V_{CE} = 25 \ \text{V}_{GE} = 0 \ \text{V}, \ \text{f} = 1 \ \text{MHz} & 0,5 \\ \end{array} $	V V mΩ					
	V mΩ					
	mΩ					
\dot{C}_{ies} $\dot{V}_{CE} = 25 V_{GE} = 0 V, f = 1 MHz$ 2,4 C_{oes} $V_{CE} = 25 V_{GE} = 0 V, f = 1 MHz$ 0,5						
C_{oes} $V_{CE} = 25 V_{GE} = 0 V, f = 1 MHz$ 0,5	n -					
$\begin{array}{c} C_{\text{oes}} & V_{\text{CE}} = 25 \ V_{\text{GE}} = 0 \ V, \ f = 1 \ \text{MHz} & 0,5 \\ C_{\text{res}} & V_{\text{CE}} = 25 \ V_{\text{GE}} = 0 \ V, \ f = 1 \ \text{MHz} & 0,4 \end{array}$						
$V_{CE} = 23 V_{GE} = 0 V, 1 = 1 WHZ 0,4$	nF nF					
R _{th(j-s)} per IGBT 1,05	K/W					
t _{d(on)} under following conditions 85	ns					
$t_r = V_{CC} = 600 \text{ V}, V_{GE} = \pm 15 \text{ V}$ 30	ns					
$\begin{array}{ccc} t_{d(off)} & I_{C} = 30 \text{ A}, T_{j} = ^{\circ}\text{C} & 430 \\ t_{t} & R_{Con} = R_{Con} = 22 \Omega & 90 \end{array}$	ns					
	ns mJ					
	mJ					
Diode - Chopper						
$V_{F} = V_{EC}$ $I_{F} = 45 \text{ A}, T_{j} = () ^{\circ}C$ 1,5 (1,5) 1,77 (1,77)	V					
$V_{(TO)} \qquad T_{j} = {}^{\circ}C (125) {}^{\circ}C \qquad (0,92)$	V					
$r_{\rm T}$ $T_{\rm j} = {}^{\circ}{\rm C} (125) {}^{\circ}{\rm C}$ (13,4)	mΩ					
R _{th(j-s)} per diode 1,2	K/W					
I _{RRM} under following conditions 30	A					
Q_{rr} $I_F = 50 \text{ A}, V_R = 600 \text{ V}$ 10	μC					
$E_{rr} \qquad V_{GE} = 0 V, T_j = °C$	mJ					
di _{F/dt} = 500 A/µs						
Diode rectifier						
$V_{\rm F}$ $I_{\rm F} = 25 \text{ A}, T_{\rm j} = () ^{\circ} \text{C}$ - 1,25	V					
$V_{(TO)}$ T _j = 150 °C 0,8	V					
$r_{\rm T}$ $T_{\rm j} = 150 ^{\circ}{\rm C}$ 13	mΩ					
R _{th(j-s)} per diode 2	K/W					
Temperatur sensor						
$R_{ts} \qquad \%, T_r = () °C \qquad ()$	Ω					
Mechanical data						
w 30	g					
M _s Mounting torque 2,5	Nm					

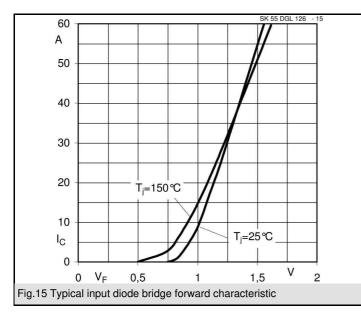


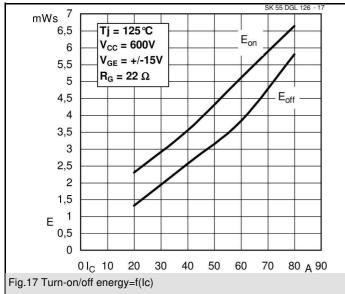


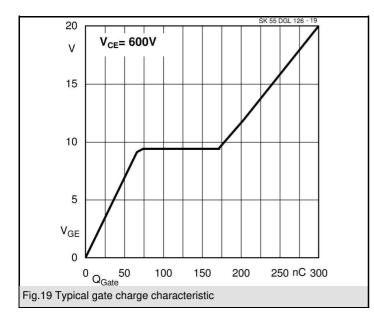


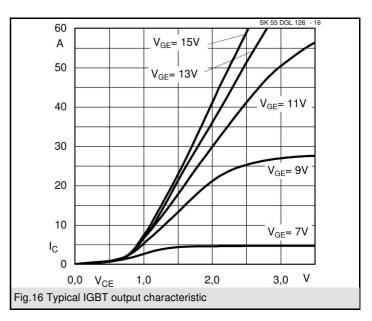


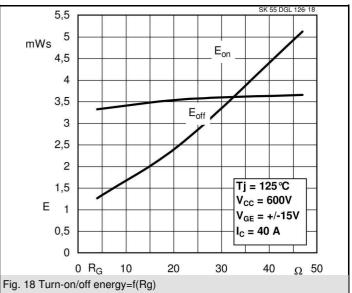

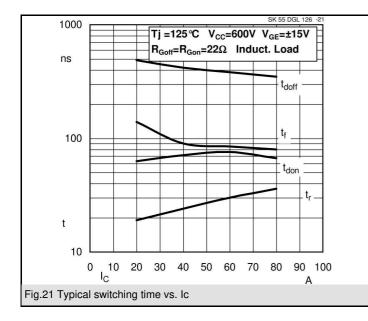

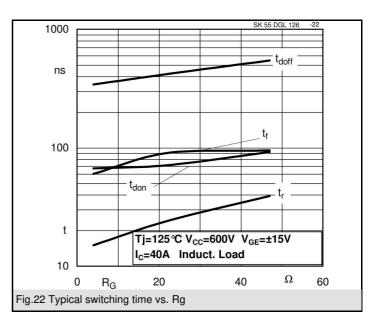

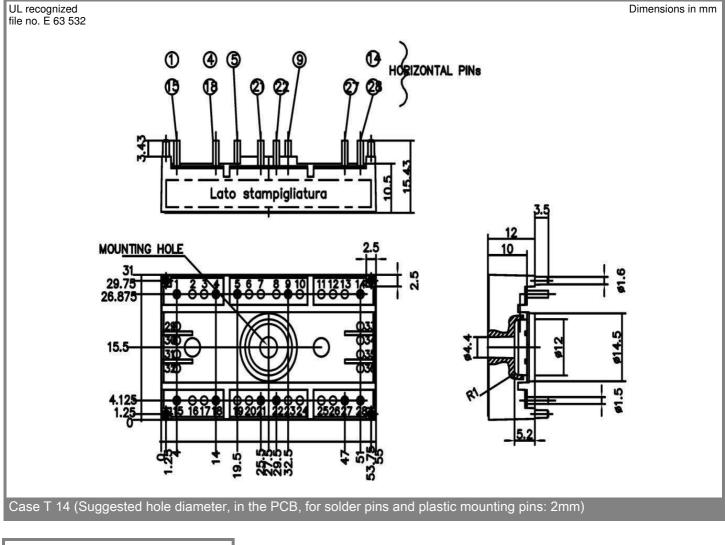



This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.